


Clés mixtes à cliquet GEARplus® RING-STOP®



Fourche inclinée à 15°  
Tête de cliquets coudée à 15°  
Denture fine

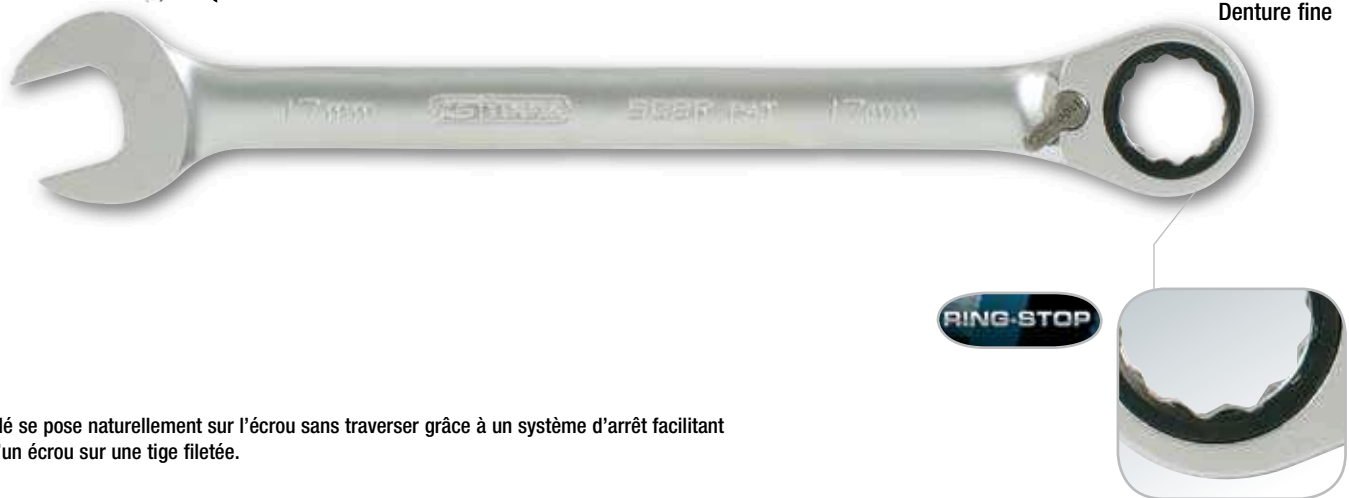

L'œil de la clé se pose naturellement sur l'écrou sans traverser grâce à un système d'arrêt facilitant le serrage d'un écrou sur une tige filetée.

	mm Ø	Nm	mm
503.4908	8	36	140
503.4909	9	48	150
503.4910	10	85	159
503.4911	11	96	165
503.4912	12	109	172
503.4913	13	138	178

	mm Ø	Nm	mm
503.4914	14	189	191
503.4915	15	240	200
503.4916	16	296	208
503.4917	17	320	226
503.4918	18	364	237
503.4919	19	387	248

Douilles traversantes RING-STOP® 12 pans



	mm Ø	mm Ø	
503.4978	8	503.4984	14
503.4979	9	503.4985	15
503.4980	10	503.4986	16
503.4981	11	503.4987	17
503.4982	12	503.4988	18
503.4983	13	503.4989	19

Adaptateurs GEARplus® RING-STOP®



Uniquement pour clés RING STOP

	mm Ø
503.4290	10
503.4292	13
503.4293	13
503.4296	10
503.4297	13
503.4298	19