

Tournes à gauche

DIN EN 24231
DIN 225



	Taille	↳ mm ↲		
331.0011	0	130	M1,0 - M8,0	1/16 - 5/16
331.0012	1	180	M3,0 - M10	1/8 - 3/8
331.0013	1.1/2	200	M3,0 - M12	1/8 - 1/2
331.0014	2	280	M4,0 - M12	3/8
331.0015	3	375	M5,0 - M20	1/4 - 3/4

Porte filières


DIN 1814



	↳ mm ↲			
331.0001	16	5	160	M1,0 - M2,6
331.0002	20	5	200	M3,0 - M4,0
331.0003	20	7	200	M4,5 - M6,0
331.0004	25	9	224	M7,0 - M6,0
331.0005	30	11	280	M10 - M11
331.0006	38	14	315	M12 - M14
331.0007	38	10	315	MF12 - MF14
331.0008	45	18	450	M16 - M20
331.0009	45	14	450	MF16 - MF20

Porte tarauds réversible à cliquet

Entraînement par la poignée transversante ou par l'écrou
Inversion du cliquet gauche/droite

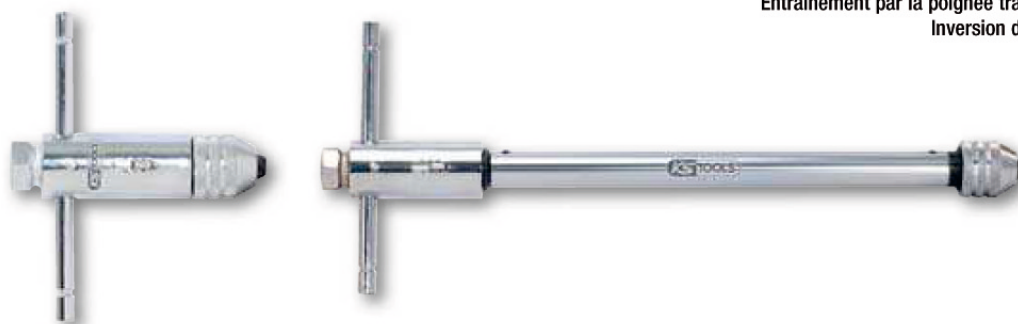

	↳ mm ↲		
331.0660	1	85	M3,0 - M10
331.0665	2	100	M5 - M12
331.0670	10	250	M3,0 - M10
331.0675	20	300	M5 - M12